

■ Datasheet: Undervoltage Release, series AMPARO




■ SCHRACK-INFO

- For AMPARO MCBs and RCBOs
- Mounted on the left side
- Fast snap on mounting


■ Technical datas

Standard	EN 60947-5-1 IEC 60947-5-1
Electrical features	
Rated voltage U_s	AC 230V 50/60Hz
Optional voltage of release	70 - 35% U_{er} reliable breaker from making < 35% U_{er} prevent breaker from making 85 - 110% U_{er} reliable operation
Rated impulse withstand voltage (1.2/50) U_{imp}	4000 V
Dielectric test voltage at ind.freq.for 1 min	2000 V
Insulation voltage U_i	500 V
Pollution degree	2
Mechanical features	
Electrical life	4000
Mechanical life	4000
Ambient temperature (with daily averages $\leq 35^\circ\text{C}$)	-5 + 40°C
Storage temperature	-25 - 70°C
Installation	
Terminal connection type	Copper Cable
Terminal size, top/bottom for cable	1 - 2,5 mm ²
Tightening torque	0,8 Nm

■ Wiring diagram

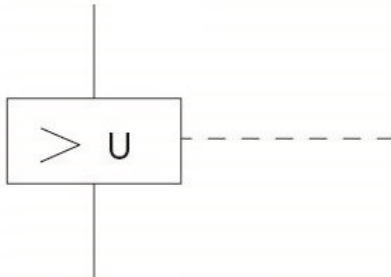

■ Dimensions

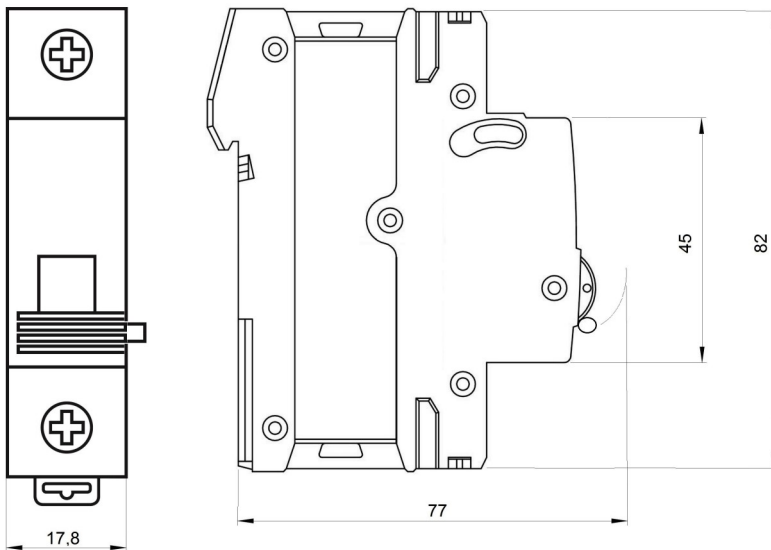

■ Articles

Unterspannungsauslöser, Serie AMPARO

Beschreibung	Artikelnummer
Unterspannungsauslöser, Serie AMPARO, AC 230V, 50/60Hz	AM900008