

■ Datasheet: Auxiliary Contact, AMPARO, 1 CO, 240V-AC, 6A, snapp-on



■ SCHRACK-INFO


- For MCB and RCBO series AMPARO
- Indication of contact-position
- To be mounted on the left side
- Snap on mounting

■ Technical datas


Standards:	IEC/EN 60947-5-1
Contact	1 CO
Rated current I_n	
U_N :	
240V-AC (50/60Hz)	6A
415V-AC (50/60Hz)	3A
24V-DC	6A
48V-DC	2A
130V-DC	1A
Insulation voltage U_i	500V
Rated impulse withstand voltage (1,2/50) U_{imp}	4kV
Dielectric test voltage at ind. Freq. For 1 min.	2kV

Polution degree	2
Electrical endurance:	> 6.000 operating cycles
Mechanical endurance:	> 10.000 operating cycles
Protection degree	IP 20
Ambient temperature:	- 5 °C to +40 °C (with daily average ≤35 °C)
Storage temperature:	- 25 °C to +70 °C
Terminal connection type	Cable
Terminal cross-section:	1 - 2,5mm ²
Terminal tightening torque:	0,8 Nm
Mounting:	snap on mounting on the left side


Mounting

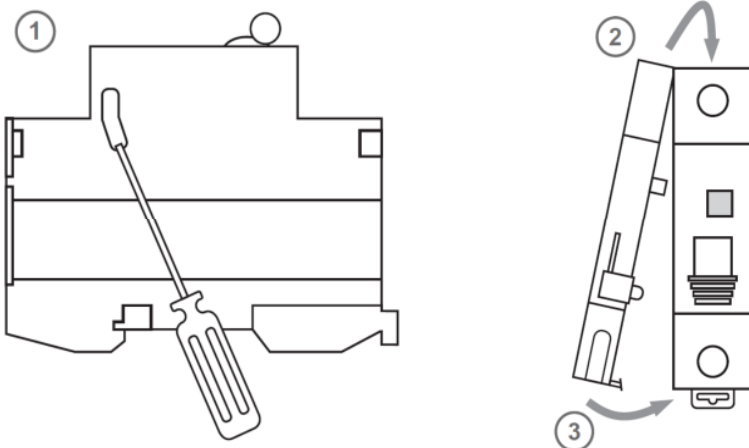

Wiring diagram

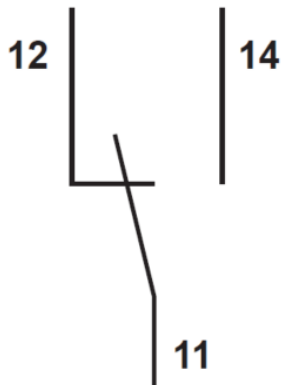

Dimensions

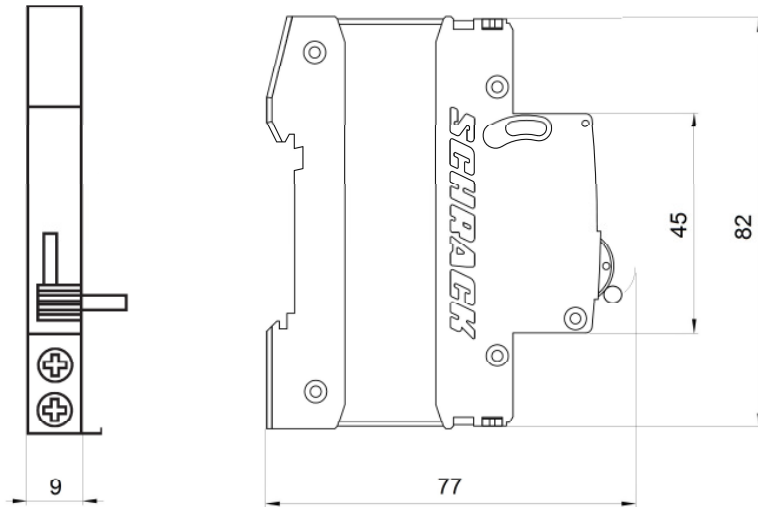

Articles

Auxiliary Contact, AMPARO

Description	order no.
Auxiliary Contact, AMPARO, 1CO, 240V-AC, 6A, snapp-on	AM900099--