

DATA SHEET: TOOLLESS KEYSTONE MODULE STP CAT.6, HSEMRJ6GWS



APPLICATION

- Module for horizontal (primary)- and vertical (secondary)- cabling
- Module for indoor use in structured cabling systems
- Module to insert into empty patchpanels and empty outlets
- Suitable for all applications Classes D and E like:
 - ISDN
 - Ethernet 10 BaseT
 - Fast Ethernet 100 BaseTX
 - Gigabit Ethernet 1000 BaseT
 - Gigabit Ethernet 1000 BaseTX
 - Token Ring 4/16 Mbit/s
 - ATM 155 Mbit/s
 - VoIP (Voice over IP)
 - PoE (Power over Ethernet)

STANDARDS

ISO/IEC 11801 (2002), EN 50173 (2002)

RoHS

Conforms to EU Directive 2002/95/EC (RoHS)

CHARACTERISTICS

Electric Performance:	Cat.6 tested
Shielded:	Zinc Alloy fully shielded
Termination:	110-style toolless
Toolless:	No special Tooling necessary
Colour Code:	EIA/TIA 568 A and B
Suitable Cables:	AWG24/1 to AWG22/1
Slim Design:	Up to 24 modules fit into 24-Port Panel 1U
Easy Design:	Module has 2 parts only
Installation:	Time-saving termination and cost
Reopenable:	Yes, without special tooling


EASY INSTALLATION

- Insert the wires according to colour code
- Trim off the excess wire
- Snap the gates closed
- Tie-Wrap the cable-shield
- Done

PACKAGING

- Each module packed in a single polybag
- Installation Manual included in each polybag

DIMENSIONS

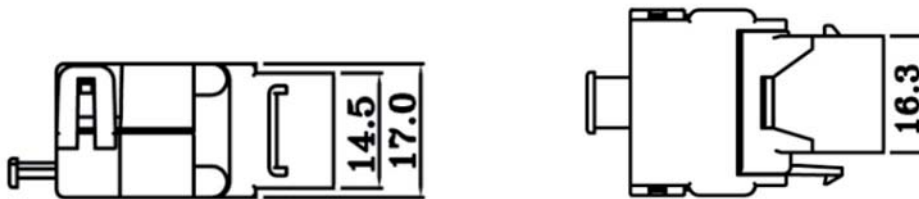

DESCRIPTION	ORDER NUMBER
Toolless Keystone Module Cat.6 STP	HSEMRJ6GWS