


■ Datasheet: Off delay timerelay, series AMPARO

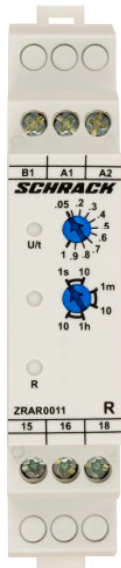

■ SCHRACK-INFO

- OFF delay
- Timerange 0,05 seconds up to 10 hours
- 1 CO, 5A

■ Technical datas

Input circuit	
Terminals	A1-A2
Supply voltage	24-48V DC / 24 ... 240 V AC
Duty cycle	100 %
Bridging time	< 30 ms
Reset time	100 ms
Drop-away voltage	<30%
Power loss	1 W
Function	R

Output circuit		
Terminals		15-16-18
Type		Relay
Number of contacts	CO	1
Contact material		AgNi
Rated voltage		250 V
Max. switching voltage		250 V
Max. switching current		5A
Rated current		5 A / 250 V
Lifetime	mechanical	1 x 10 ⁶ operation cycle
	Electrical	1 x 10 ⁵ operation cycle
Switching frequency	with load	6/min
	without load	1200/min
Back up fuse		5A fast acting

Indicator		
Supply voltage	LED U/t (green) on	Supply voltage closed
	LED U/t (green) flashing	Display time
	LED R (yellow) on	Relay is on


Datas of insulation		
Pollution degree (IEC 61812-1)		2
Overvoltage category (IEC 61812-1)		II
Rated insulation voltage (IEC 61812-1)	Input circuit / outout circuit	300 V
Rated surge voltage (IEC 61812-1)	Input circuit / outout circuit	2.500 V
Insulation-test-voltage (IEC 61812-1)	Input circuit / outout circuit	1.600 V
Insulation	Input circuit / outout circuit	Basic insulation


Electrical connection		
Terminal		Screw-terminal
Terminal capacity	Rated terminal capacity	2,5mm ²
Max. terminal capacity	flexible with/without ferrule	1x 0,25 ... 2,5 mm ² (23 AWG ... 14 AWG)
	flexible without sleeve	2x 0,25 ... 1,5 mm ² (23 AWG ... 14 AWG)
	flexible with twin-sleeve	2x 0,25 ... 1,5 mm ² (23 AWG ... 14 AWG)
	Stranded without sleeve	1x 0,25 ... 2,5 mm ² (23 AWG ... 14 AWG)
Length without insulation		7 mm
Tightening torque		max. 0,5 Nm


Mechanical datas		
Ambient temperature	Operation	-25 ... +50 °C
Dimensions (accord. DIN 43880)	LxHxD	17,5 x 97 x 57,9 mm
Mounting		DIN-rail (EN 60715)
Installation position		In any order
Protection class	Cover	IP40
	Terminals	IP20

Function


R

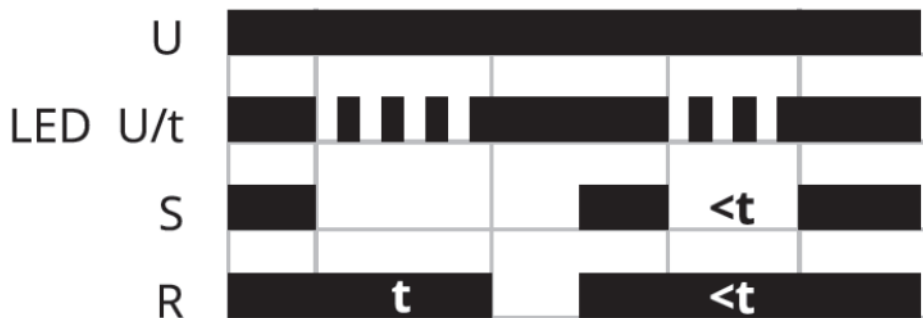

 Wiring diagram

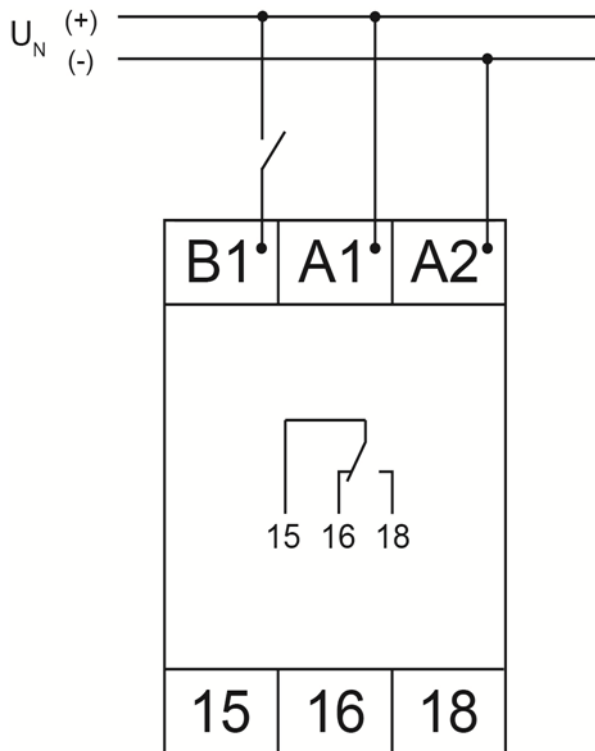

Dimensions

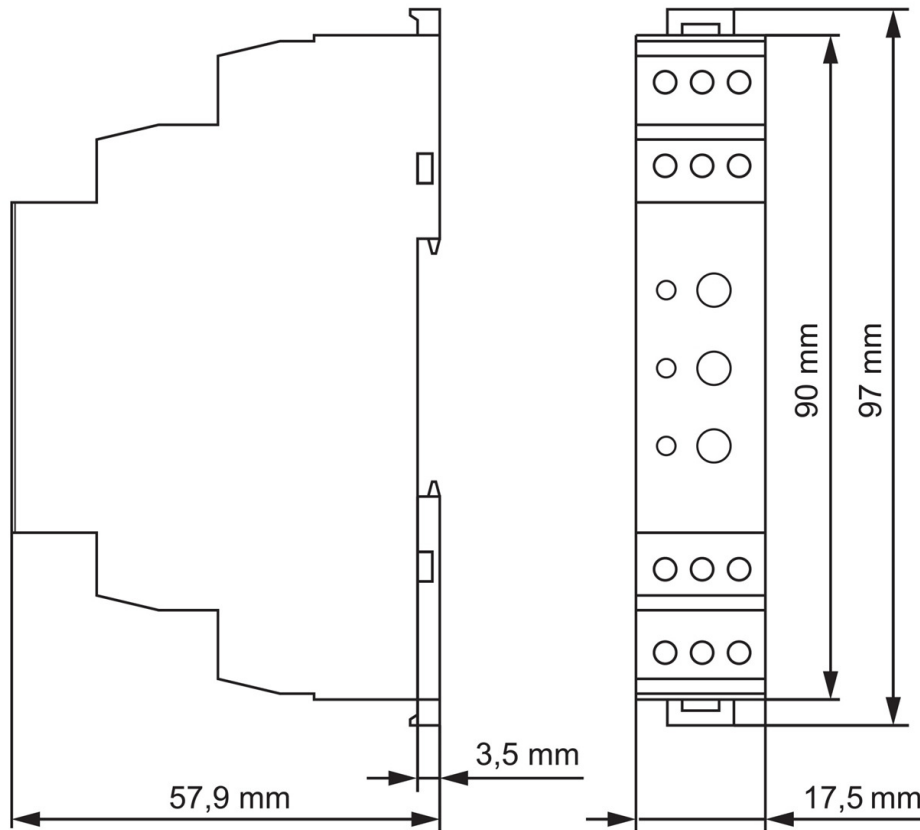

Articles

Description	Orderno.
Single function timerelay R (OFF delay), series AMPARO, 1CO, 5A	ZRAR0011--