

Modular switch with push-button




BZ107010

Schrack-Info


- Latching push-button
- Lift terminals with protection against incorrect insertion

Type	BZ107010	BZ107020	BZ107030	BZ107050
Function	switch with push-button			
Function of contact	1 NO	2 NO	1 NO + 1 NC	1 CO
Standards	EN 60669-1			
Rated voltage	250V AC			
Rated frequency	50/60 Hz			
Rated current	16 A			
Max. back up fuse	20A gG			
Degree of protection	IP40			
Finger and hand touch safe:	in according to BGV A3, VBG4			
Climatic conditions	in according to IEC/EN 60068			
Terminals	lift-terminals			
Terminal capacity	1-10mm ²			


BZ1070 Dimensions

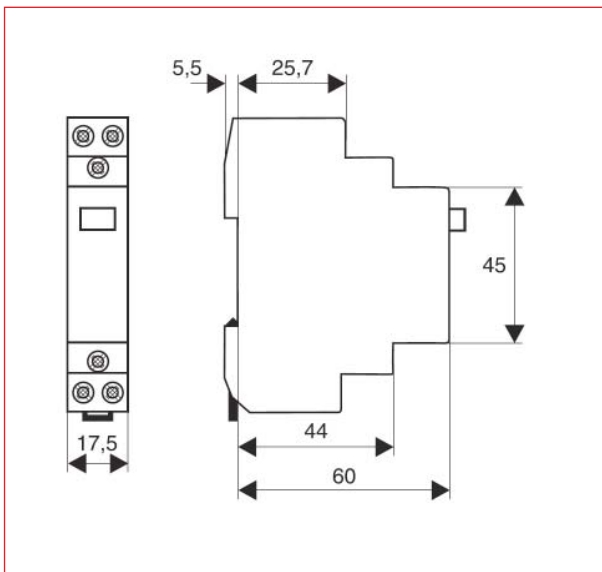


BZ107010 Wiring diagram

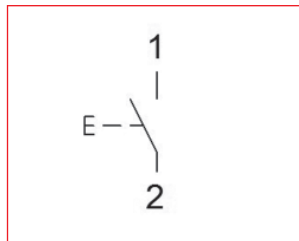


BZ107030 Wiring diagram

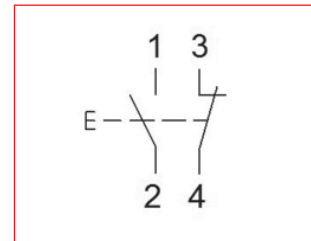

BZ107020 Wiring diagram

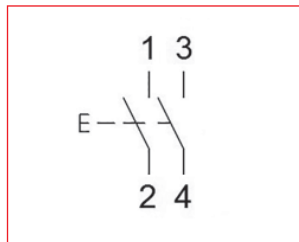

BZ107050 Wiring diagram

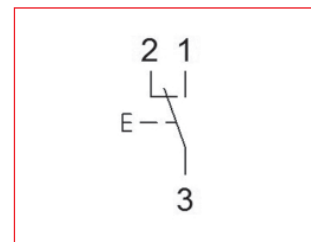

DESCRIPTION	AVAILABLE	ORDER NO.
16A, 1 NO		BZ107010
16A, 2 NO		BZ107020
16A, 1 NO + 1 NC		BZ107030
16A, 1 CO		BZ107050