

Current Transformers

Current-Transformers, for busbar 50x10mm



MG956040-A

Schrack-Info

- Passing busbar primary
- Single-phase current transformer
- For busbars up to 50 x 20 or 60 x 10 mm
- Primary current 400...600A
- Secondary current 5A


Technical Data

Reference Standards	EN60044-1
Specifications	
Rated primary current I_{pr} :	400A, 600A
Rated frequency:	50Hz
Rated secondary primary current I_{pr} :	5A
Housing	
Housing material:	self-extinguishing polycarbonate, classification V0 according to UL-94
Protection degree (EN60529):	IP00 terminals IP20 with terminal cover
Fixing:	screw facility for wall mounting
Weight:	500 gr.
Connections	
Secondary winding:	screw terminal M4 and Faston 6,3x0,8 mm


Rated Burden

Type:	Class 0,5	Class 1	Class 3
400/5A		4VA	6VA
600/5A	4VA	6VA	8VA

Dimensions

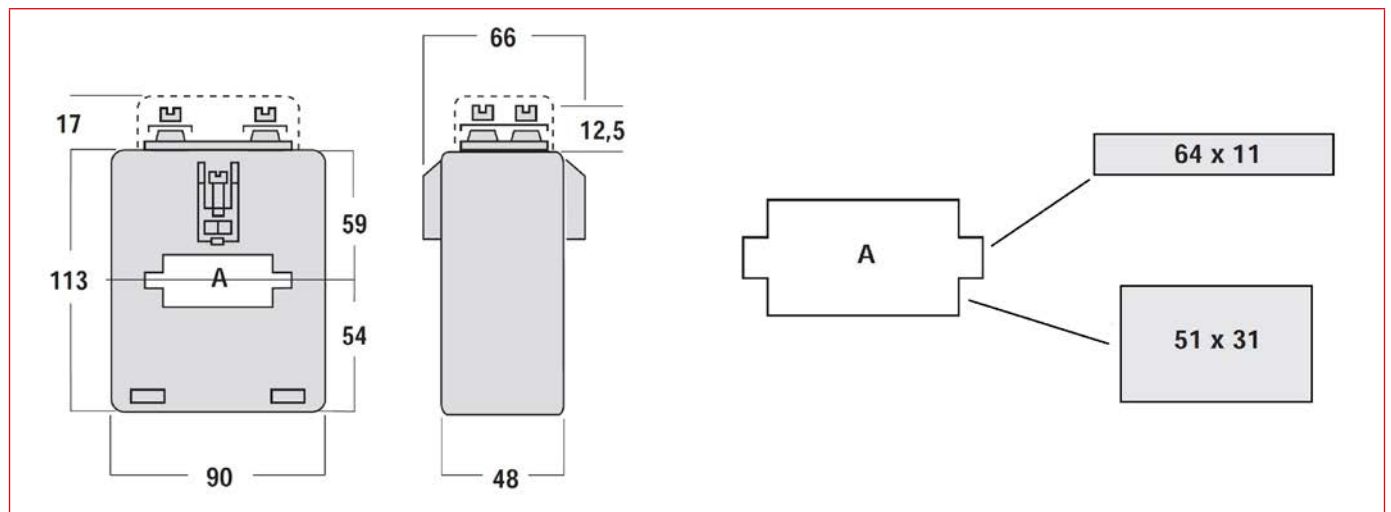

Wiring Diagram

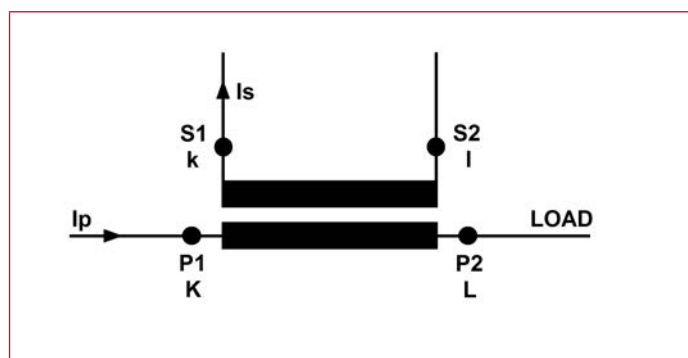

DESCRIPTION	AVAILABLE	ORDER NO.
400/5A		MG956040-A
600/5A		MG956060-A