

## Current-Transformers, for busbar 65 x 32mm



MG957150-A

### Schrack-Info

- Passing busbar primary
- Single-phase current transformer
- For busbars up to 65 x 32 mm
- Primary current 800...2000A
- Secondary current 5A

### Technical Data

<b>Reference Standards</b>	EN60044-1, BS3938, BS7626
<b>Specifications</b>	
Rated primary current $I_{pr}$ :	800A, 1000A, 1500A, 2000VA
Rated frequency:	50Hz
Rated secondary primary current $I_{pr}$ :	5A
<b>Housing</b>	
Housing material:	self-extinguishing polycarbonate, classification V0 according to UL-94
Protection degree (EN60529):	IP00 terminals IP20 with terminal cover
Fixing:	screw facility for wall mounting
Weight:	750 gr.
<b>Connections</b>	
Secondary winding:	screw terminal M4


### Rated Burden

Type:	Class 0,5	Class 1	Class 3
800/5A	12VA	15VA	20VA
1000/5A	15VA	20VA	25VA
1500/5A	20VA	25VA	30VA
2000/5A	20VA	25VA	30VA


# Current Transformers

## Current-Transformers, for busbar 65 x 32mm

### Dimensions

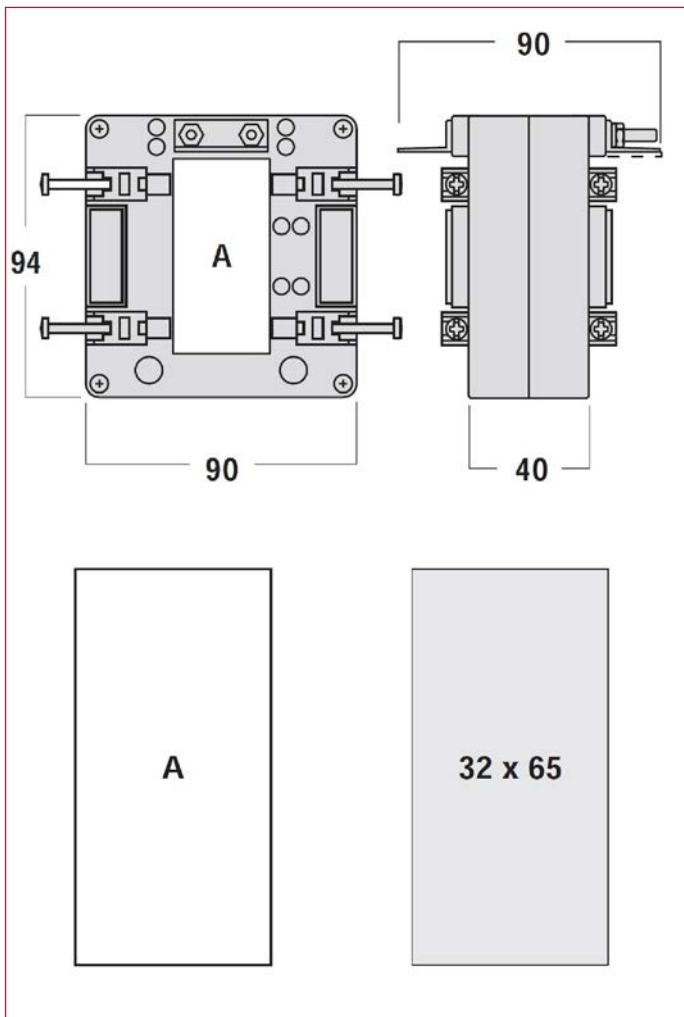

### Wiring Diagram

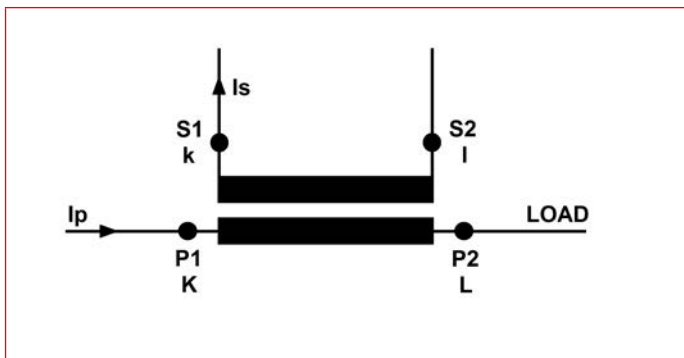

DESCRIPTION	AVAILABLE	ORDER NO.
800/5A		<a href="#">MG957080-A</a>
1000/5A		<a href="#">MG957100-A</a>
1500/5A		<a href="#">MG957150-A</a>
2000/5A		MG957200-A