

Current-Transformers, for busbar 80x30mm



MG958100-A

Schrack-Info

- Passing busbar primary
- Single-phase current transformer
- For busbars up to 80 x 30 mm
- Primary current 1000...2500A
- Secondary current 5A

Technical Data

Reference Standards	EN60044-1, BS3938, BS7626
Specifications	
Rated primary current I_{pr} :	1000A, 1500A, 2000VA, 2500VA
Rated frequency:	50Hz
Rated secondary primary current I_{pr} :	5A
Housing	
Housing material:	self-extinguishing polycarbonate
Protection degree (EN60529):	classification V0 according to UL-94 IP00 terminals IP20 with terminal cover with shroud
Mounting:	Fixing screw facilities for bar
Weight:	700 grams
Connections	
Secondary winding:	tightening by nut M4


Rated Burden

Type:	Class 0,5	Class 1	Class 3
1000/5A	10VA	15VA	20VA
1500/5A	15VA	20VA	25VA
2000/5A	20VA	25VA	30VA
2500/5A	25VA	30VA	40VA


Current Transformers

Current-Transformers, for busbar 80x30mm

Dimensions

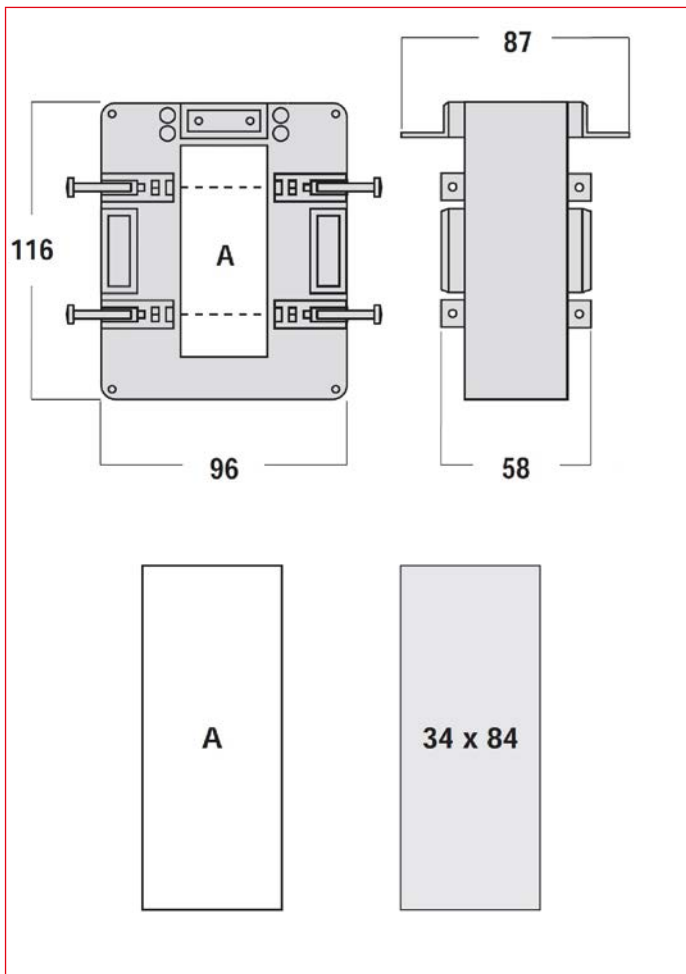

Wiring Diagram

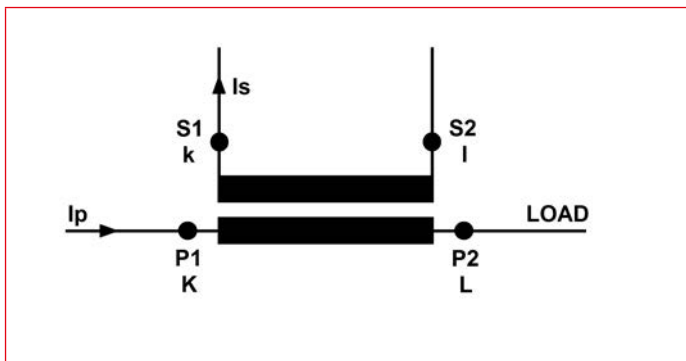

DESCRIPTION	AVAILABLE	ORDER NO.
1000/5A		MG958100-A
1500/5A		MG958150-A
2000/5A		MG958200-A
2500/5A		MG958250-A